
SPENCER JJLO

SUPER ROCKER

FIBERGLASS MEDIUM LIGHT

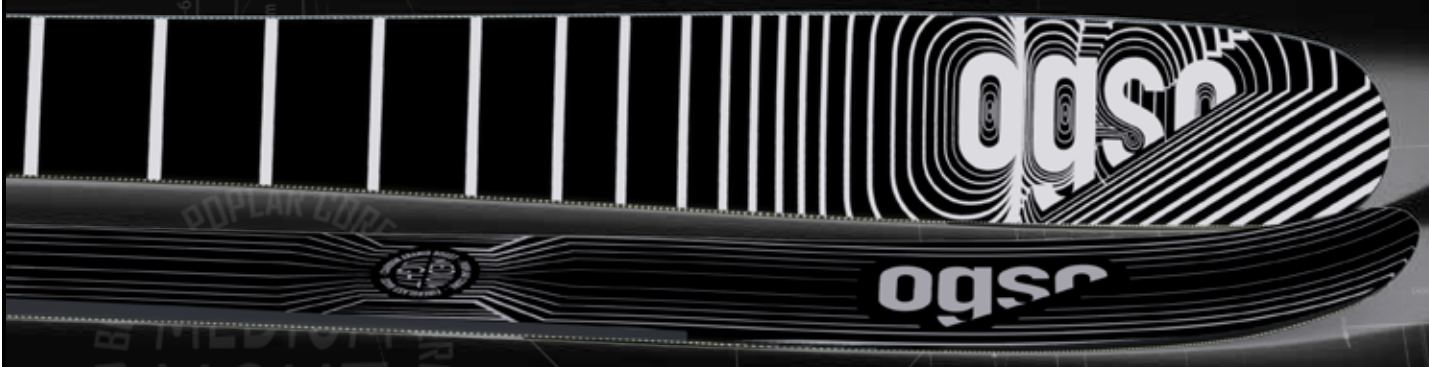

Scan to watch on

GO RIDE A WILD HORSE...


"Kenny Rogers"

ogsc
MOUNTAIN
ESSENTIALS

SPENCER 1110

SUPER ROCKER

FIBERGLASS MEDIUM LIGHT

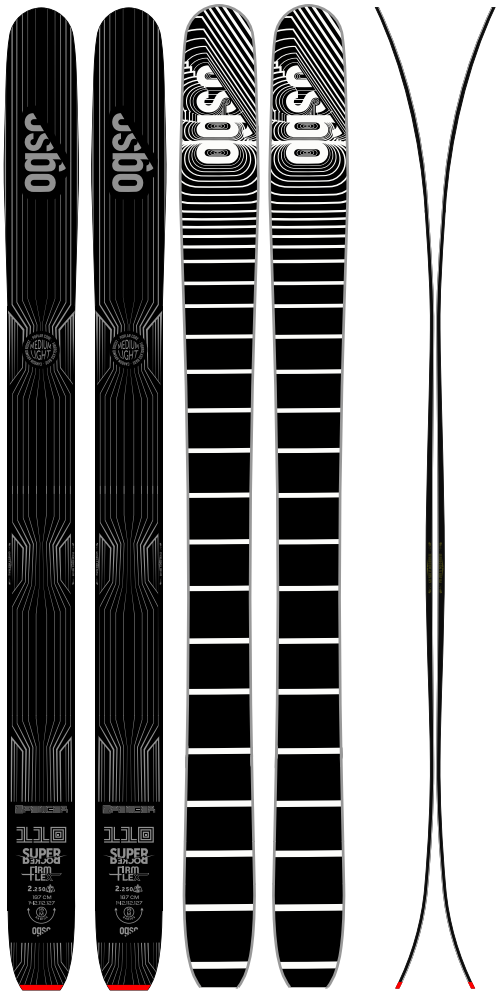

GO RIDE A WILD HORSE...

"Kenny Rogers"

[SOLID TOURING]

SPENCER is a MEDIUMLIGHT FREETOURING POWDER tool designed to be versatile enough for both big mountain powder surfing as well as making small, easy turns at your favorite resort.

If you're looking for a powerful, versatile ski to make easy, surfy turns in all snow conditions then SPENCER is the ski for you.


An ISOSPORT 7510 base is a racing standard base that provides fast glide and outstanding durability.


POPLAR CORE · MEDIUM LIGHT · FIBERGLASS BASE · CARBON ABAMID BOOST

SUPER ROCKER


FIRM FLEX

SIZE: [171] [179] [187] [195]

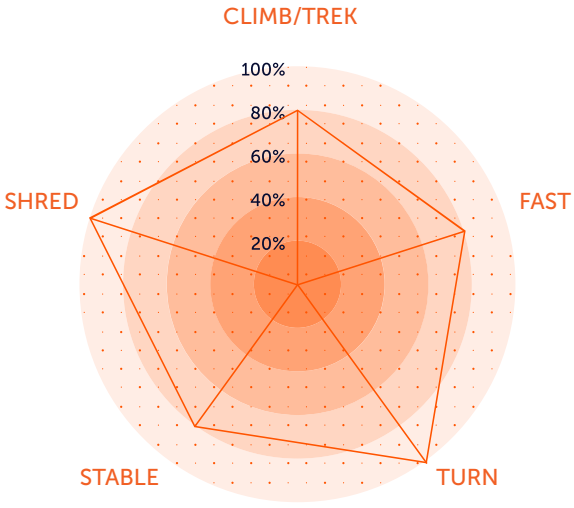

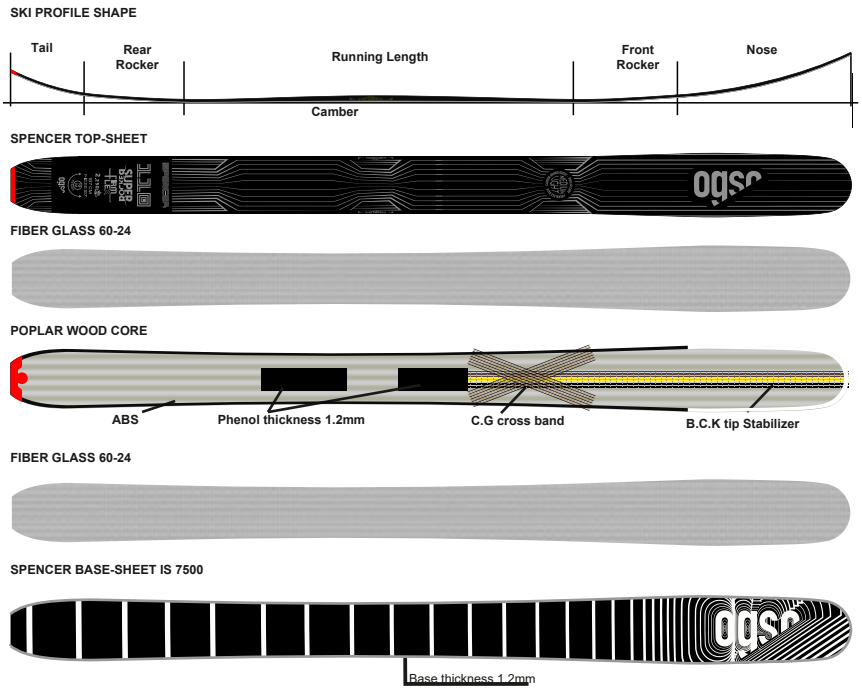

ogsc
MOUNTAIN
ESSENTIALS

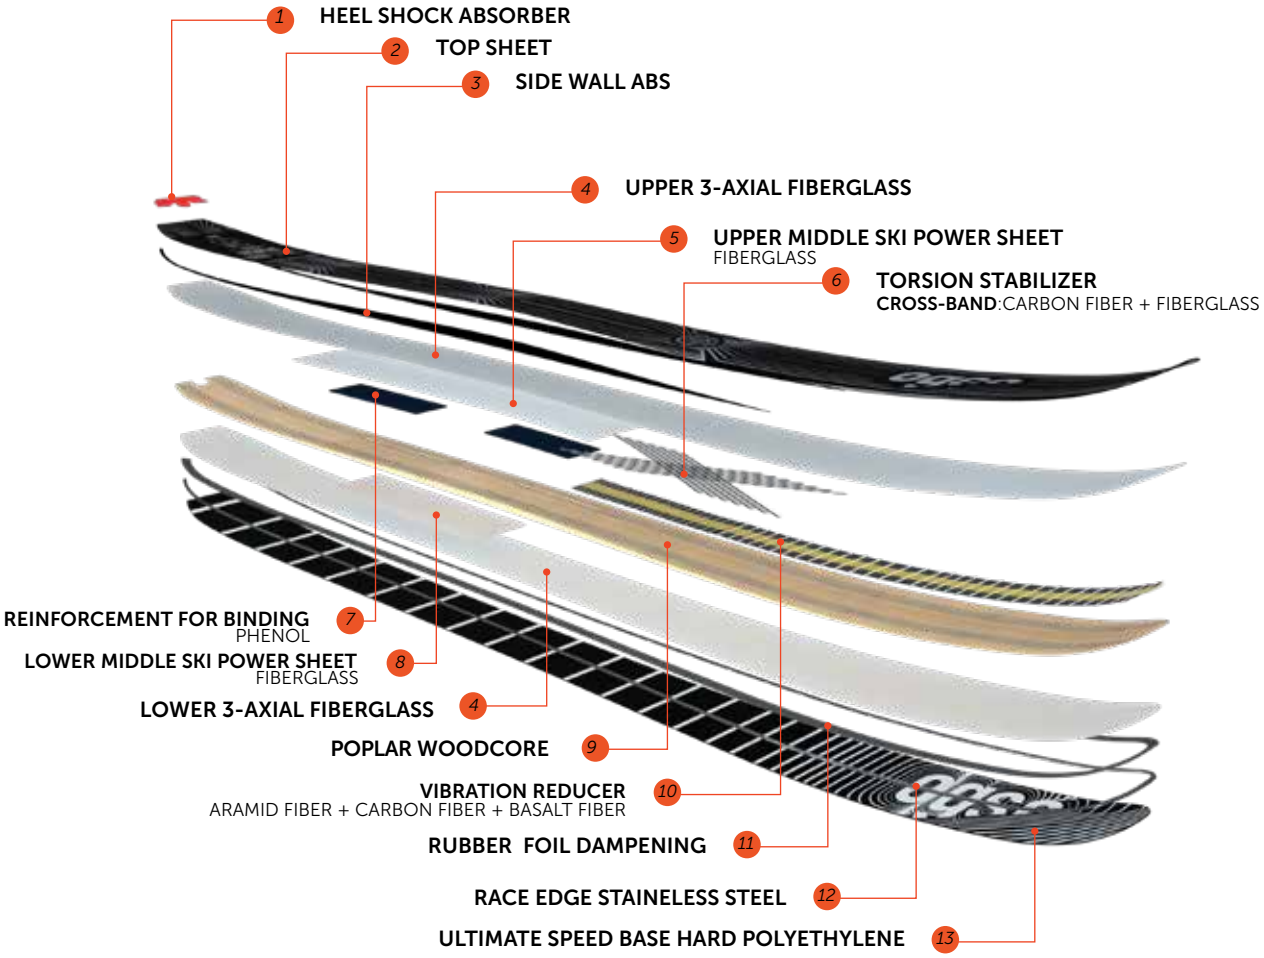


Spencer 110 SUPER ROCKER MEDIUM LIGHT

Commercial Length (cm)	171	179	187	195
A: Flat Length (cm)	170,3	178,05	186,1	195,65
B: Air Length (cm)	169,8	177,5	185,5	194
Surface Area (cm^2)	1995	2129	2262	2412
Weight (kg)	1,85	2,05	2,25	2,45
Width Measures: Front, Middle,Back (mm)	136,108,123	139,110,125	142,112,127	145,115,129
Radius Average (m)	17	19	21	24
Radius Center (m)	15	17	19	22
Nose Rise Length (mm)	340	355	370	385
Tail Length (mm)	175	185	195	205
Front Rocker Length (mm)	220	230	240	250
Back Rocker Length (mm)	220	230	240	250
Running Length (mm)	755	790	825	860
Camber Height (mm)	3	3	3	3
Nose Height (mm)	96	96	96	100
Tail Height (mm)	60	60	60	63
E: Middle Boot From Tail including tail protection (mm)		780	815	850

ogsc
MOUNTAIN
ESSENTIALS

MEDIUM LIGHT SKI
COMPOSITION

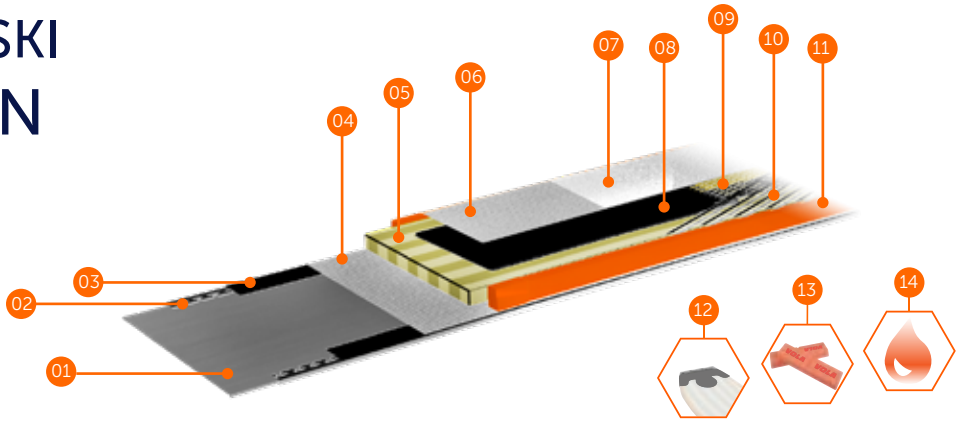

01 BASE SHEET IS 7500

www.isosport.com

ISOSPORT

- Transparent.
- Made of premium crosslink polyethylene.
- Good abrasion resistance, very low stress level.
- Modified with wax for better gliding.

02 STAINLESS EDGE

www.waelzholz.com

WAELZHOLZ

The steel racing edge provides smooth flex and minimal friction resistance.
The main characteristics of stainless steel are as follows:
- High durability
- Good ductility
- Optimal gliding behaviour
- Improved adhesion
- High mechanical strength

03 RUBBER

www.haberkorn.ch

HABERKORN
EINFACH BESSER

Thin rubber used between the metal edge and fiberglass layers to minimize shearing-induced delamination.
Equalising temperature-related expansion and differing stress-strain coefficients.
Suitability for use over a wide temperature range.
Vibration damping up to the point of component

04 FIBERGLASS 60-24

06

www.pgtex.cn

PGTEX

E-glass fibre products are particularly resistant to abrasion and vibration and have excellent flexibility.
The glass thread has a higher specific resistance (tensile strength/volumetric mass) than that of steel.
This feature makes it possible to develop glass threads that reinforce high performance composites.
The main characteristics of Fiberglass are as follows:
- Good resistance to abrasion and vibrations
- Rot-resistant
- Excellent dielectric strength
- Excellent dimensional stability

05 POPLAR WOOD CORE

FSC certified forest management.
Poplar wood is tough, with high mechanical strength and strong corrosion resistance; moderate hardness and strength.
Poplar woodcore have several advantages such as:

Very good ratio of weight, flexibility, stability and torsion,
Low weight when compared to other cores
Flexible application possibilities,

FSC

07 TOP SHEET 5275

www.isosport.com

ISOSPORT

The main characteristics of polyamides are :
- Resistance to aging over long periods.
- High mechanical strength and high rigidity.
- Functional tenacity even at low temperatures.
- Excellent dielectric properties.
- Good resistance to abrasion.

08 PHENOL REINFORCEMENT FOR BINDING

www.isosport.com

ISOSPORT

In this material, the high-strength papers are impregnated with phenolic resins and compressed into sheets of durable, durable and reactive material. This material is characterized by its excellent mechanical properties to hold the srews in place.

09 VIBRATION & CRACKING REDUCER

BAND (basalt-fiber+carbon-fiber+aramid fiber)

www.chomarat.com

CHOMARAT

The unidirectional ribbon is composed from a carbon frame that surrounds a large basalt and kevlar fiber core in a continuous weft.

The Carbon frame provides:
- High stiffness
- High tensile strength
- Excellent impact resistance

The Basalt & Kevlar core provides:
- Excellent dielectric insulation
- High modulus of elasticity
- Excellent vibration damping

10 TORSION STABILIZER

CROSS-BAND (carbon fiber+fiberglass)

www.chomarat.com

CHOMARAT

The ribbon is unidirectional carbon fiber with continuous weft. It is a light and open reinforcement.
- Narrow ribbons
- Excellent alignment of fibers
- Less crimped with good mechanical properties at 0°
- Ensures the rigidity and stability of the parts

11 SIDE WALL ABS

www.isosport.com

ISOSPORT

Especially designed for winter sport applications.
Charpy impact strength notched: +23 C°/-25C°
ISO DUR ID1000-147

12 HEEL SHOCK ABSORBER

The material we use is ELASTOLLAN R1000 from BASF.
Glass fibre reinforced thermoplastic Polyester-Poly-urethane-Elastomer with exceptional properties, very
high impact resistance, high modulus with at the same time elasticity, low coefficient of thermal expansion
comparable with steel and aluminium.
- Modulus of elasticity - tensile test : 1000MPa
- Density : 1.36g/cm³
- Hardness : 60 Shore D
- Glass-fiber content : 20%
- Tensile strength : 50MPa
- Impact + notch strength : +23
  -30

Injected by Injection 74

www.polyurethanes.basf.com
www.injection74.com

BASF
INJECTION 74
afag ISO 9001

13 VOLA WAX

www.vola.fr

VOLA

Racing universal wax 500G orange.
Ski wax improves the coefficient of friction performance under varying snow conditions.

Universal 500G designed to match with the varying properties of snow, including crystal type and size, and moisture content of the snow surface, which vary with temperature of the snow.

14 RESIN


www.sicomin.com

Sicomin

Bio Based resin is outcoming from the latest innovations in bio-based chemistry.
Bio Based resin is produced with a high content of carbon from plant origin.
The bio-based Carbon content of our supplier's system is certified by an independent laboratory using Carbon 14 measurements (ASTM D6866 or XP CEN/TS 16640)
This is a significant technological advance on the following points: Clarity, colour, performances and guarantees of industrial tonnages availability.

GreenPoxy


Spencer 110 SUPER ROCKER MEDIUM LIGHT				
Commercial Length (cm)	**171**	**179**	**187**	**195**
A: Flat Length (cm)	170,3	178,05	186,1	195,65
B: Air Length (cm)	169,8	177,5	185,5	194
C: Start rear phenol	465	500	535	570
D: End rear phenol	665	700	735	770
E: Middle Boot From Tail including tail protection (mm)	745	780	815	850
F: Start front phenol	805	840	875	910
G: End front phenol	965	1000	1035	1070

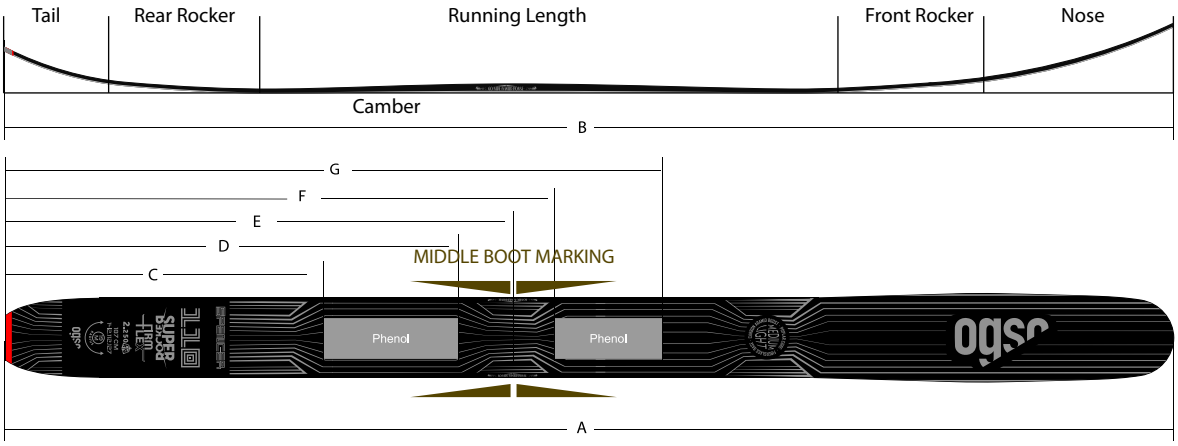


SCREWS RECOMMENDED

MEDIUM LIGHT SERIES






SHARPENED STEEL EDGE AREA

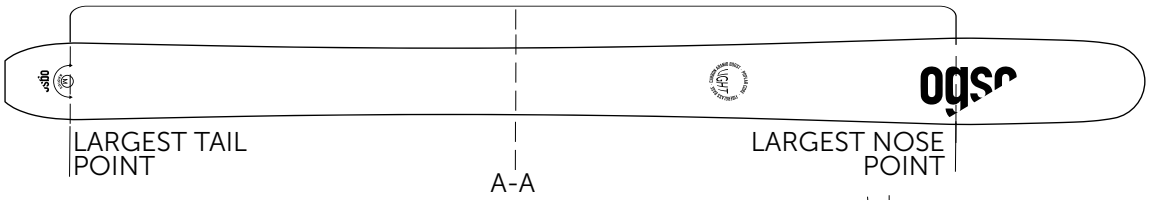

EDGE ANGLE A-A

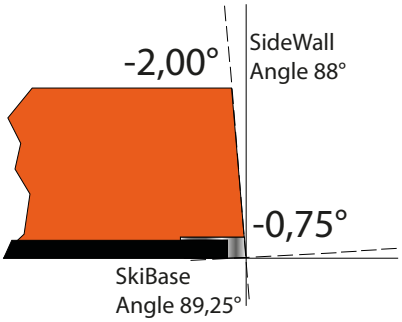

© 2015 OGSO Mountain Essentials. All rights reserved.